


WINSLOW ADAPTICS

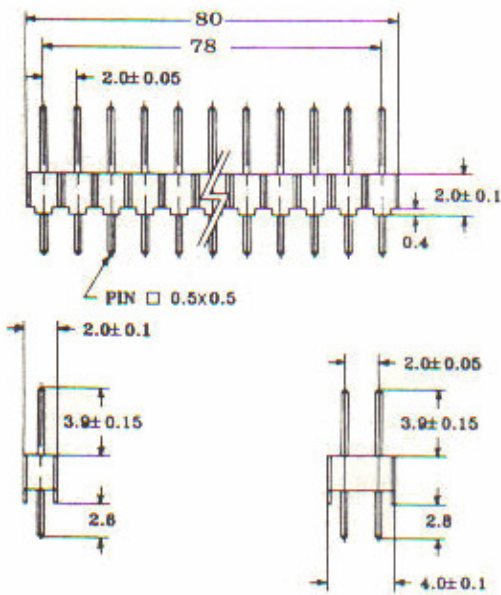

STANDARD PIN-OUTS/STRAIGHT

W281140G = 40 PIN SINGLE ROW
W282180G = 80 PIN DOUBLE ROW

SPECIAL PIN-OUTS

For smaller number of pins replace '40' or '80' with number of pins required.

SPECIFICATIONS:

Insulator	Glass-filled Polyester
Flammability	UL94 V-O
Terminal	Copper Alloy
Pin Pushout Force	1 KG (min.)
Current Rating	1 Amp (max.)
Temperature Rating	-55°C to +125°C



Solutions to Component Leadtime and Obsolescence

Also available from Winslow Adaptics are cost effective, time saving solutions to test, obsolescence, supply problems and upgrades. OEMs can upgrade equipment with custom Adaptics utilising additional logic, often saving considerable cost and time on re-design. If lead-time becomes an issue contact us for a suitable package converter. We specialise in conversion of all package lead-frames. For further information please contact your nearest sales office

sales@winslowadaptics.com

www.winslowadaptics.com